



| | |
|-----------------|-------------|
| DATE | APPROVED |
| 09/22/97 | S. FLETCHER |
| DESCRIPTION | |
| PRELIMINARY | |
| RELEASED TO IPC | |
| DATE | |
| 02/01 | |
| RELEASED TO IPC | |
| DATE | |
| 01/01 | |
| RELEASED TO IPC | |

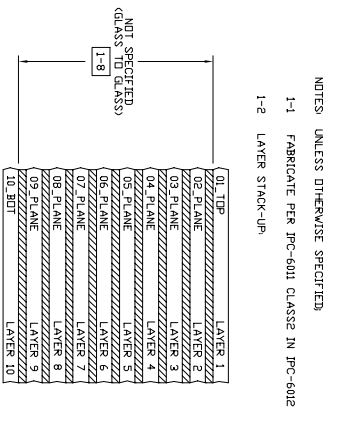

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1-1 FABRICATE PER IPC-6011 CLASS2 IN IPC-6012
 - 1-2 LAYER STACK-UP
 - 1-3 HOLES NOT TO BE PLATED THROUGH
 - 1-4 TOOLING HOLES
 - 1-5 MARK VENDOR LOGO AND DATE CODE IN APPROXIMATE AREA SHOWN ON THE SOLDER SIDE.
 - 1-6 AFFIX REVISION LEVEL OF THIS DRAWING NEXT TO PCB PART NUMBER ON THE SECONDARY (BOTTOM) SIDE.
 - 1-7 LOCATION FOR 'PERFECT TEST' CUPRON
 - 1-8 BOARD THICKNESS VARIES BY TEST BOARD. TO BE SPECIFIED ON A CASE BY CASE BASIS.

| SYM | DRILLED HOLE DIAMETER | QTY | TOTL |
|-----|---|------|------|
| * | 0.27 ± 0.02 (0.045 ± 0.003) | 1090 | T01 |
| * | 0.46 ± 0.03 (0.08 ± 0.01) | 186 | T02 |
| o | 0.59 ± 0.03 (0.09 ± 0.003) | 210 | T03 |
| o | 0.57 ± 0.03 (0.0825 ± 0.001) | 186 | T04 |
| 4 | 0.54 ± 0.03 (0.08 ± 0.003) | 210 | T05 |
| o | 0.71 ± 0.03 (0.0874 ± 0.003) | 186 | T06 |
| v | 0.74 ± 0.03 (0.09 ± 0.003) | 210 | T07 |
| * | 0.81 ± 0.03 (0.092 ± 0.001) | 186 | T08 |
| * | 0.89 ± 0.03 (0.092 ± 0.001) | 94 | T09 |
| 1-4 | 1.29 ± 0.02 (1.20 ± 0.001) | 3 | T10 |

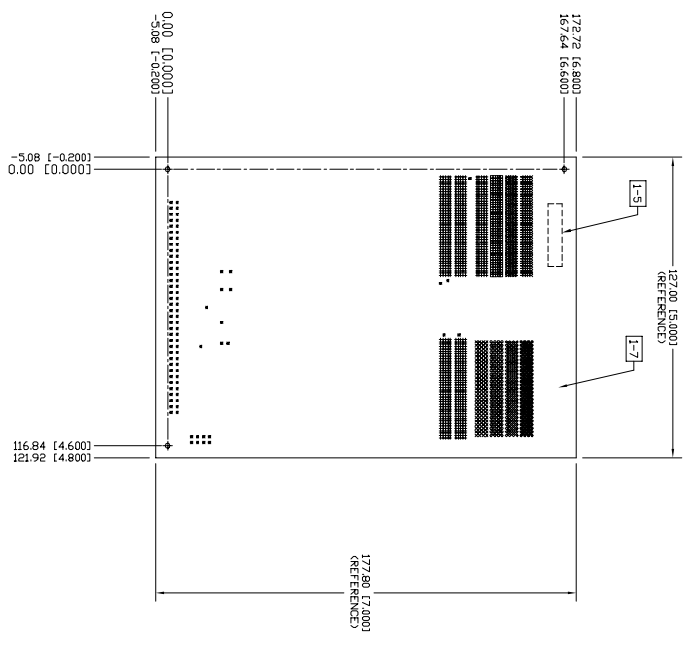

COMPONENT SIDE

| | | |
|----------|------|------------------|
| ITEM QTY | UNIT | DESCRIPTION |
| 1 | PCB | PCB FAB, CAF TV1 |

UNLESS OTHERWISE SPECIFIED

DATE: 04/06/00

SCALE: 1/1

PCB FAB, CAF TV1

SUN PCB FAB, SAN ANTONIO, TEXAS